


COMMERCIAL TYPE - **SIMPLE** AIR CURTAINS
120 mm cross flow fan




R,L - 33

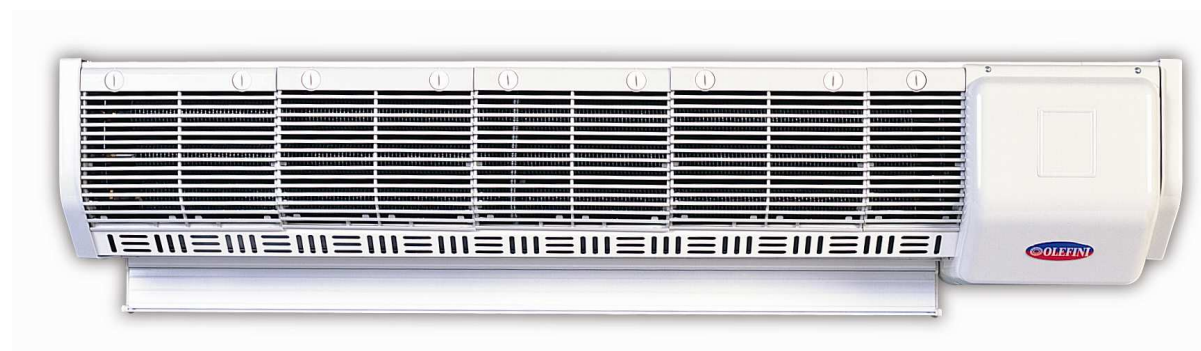

For use in :

- **Department Stores**
- **Large Hotels**
- **Large Fast Foods**
- **Airports**
- **Bus Stations**

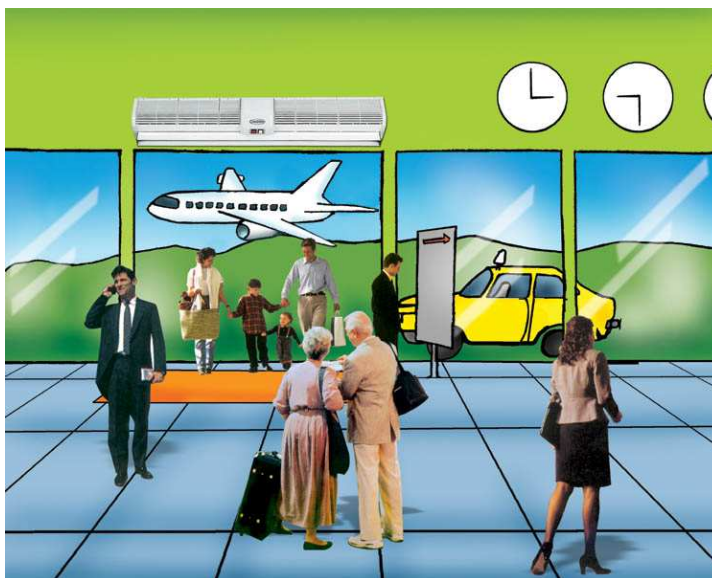

COMMERCIAL TYPE - **SIMPLE** AIR CURTAINS

120 mm cross flow fan




Air Curtain R,L – 33 is capable of covering openings of 1.00 m long

Technical Details


Max Door Height (m)	4.00
Max Door Width (m)	1.00
Outlet Velocity (m/sec)	13/11
Air Volume (m ³ /h)	3270/2770
Motor Power (W)	660
Capacitor (μF)	12
Motor Speed (rpm)	1370/1050
Power Supply	230V, 1N, 50Hz
Noise level in 1 m (dB)	63 / 62

AIR VELOCITY DISTRIBUTION CHART

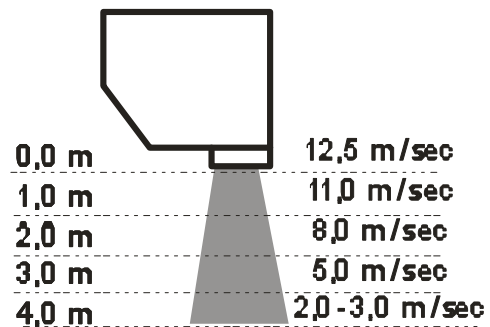

Dimensions

A: Total Length	1148±2 (mm)
B: Total Width	212 (mm)
C: Height	205 (mm)
D: Outlet Length	900 (mm)
E: Outlet Width (int.)	60 (mm)
K: Outlet width (ext.)	76 (mm)
H: Outlet Height	64 (mm)
Weight	19 (Kgr)

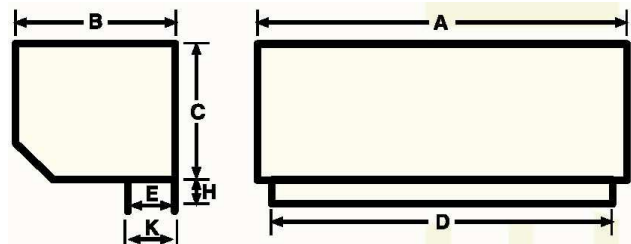

COMMERCIAL TYPE - SIMPLE AIR CURTAINS
120 mm cross flow fan



OPERATIONAL CHOICES

A) Wired Remote Control Operation

Wall Mounted Wired Remote Control (up to 3 m cable) additionally can be supplied with an Infrared Remote Control as well .



B) Infrared Remote Control Operation

Unit is provided with a build in Panel (electronic) and an Infrared Remote Control .



Cases A and B can be either delivered :

- 1). Two speed operation (HI - LOW)
- 2). NL operation :
 - 15 different speeds
 - 1 up to 240 units in parallel connection
 - Master - Slave Operation
 - OLEFINI BMS monitoring

