

INDUSTRIAL TYPE - SIMPLE AIR CURTAINS

133 mm cross flow fan



K - 26



For use in :

- **Large Industrial Spaces**
- **Storage Plants**
- **Storage Areas**
- **Airports**
- **Cold Rooms**



INDUSTRIAL TYPE - **SIMPLE** AIR CURTAINS

133 mm cross flow fan




Air Curtain K – 26 is capable of covering openings of 1.60 m long

Technical Details


| | |
|--------------------------------|----------------|
| Max Door Height (m) | 6.00 |
| Max Door Width (m) | 1.60 |
| Outlet Velocity (m/sec) | 14/12 |
| Air Volume (m ³ /h) | 4245/3640 |
| Motor Power (W) | 660 |
| Capacitor (µF) | 12 |
| Motor Speed (rpm) | 1370/1100 |
| Power Supply | 230V, 1N, 50Hz |
| Noise level in 1 m (dB) | 68 / 65 |

AIR VELOCITY DISTRIBUTION CHART

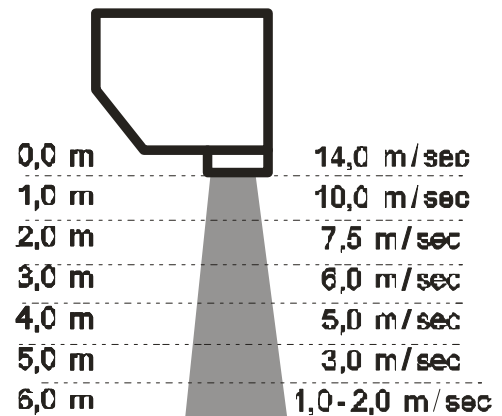

Dimensions

| | |
|------------------------|-------------|
| A: Total Length | 1660±2 (mm) |
| B: Total Width | 231 (mm) |
| C: Height | 227 (mm) |
| D: Outlet Length | 1603 (mm) |
| E: Outlet Width (int.) | 60 (mm) |
| K: Outlet width (ext.) | 76 (mm) |
| H: Outlet Height | 64 (mm) |
| Weight | 26 (Kgr) |

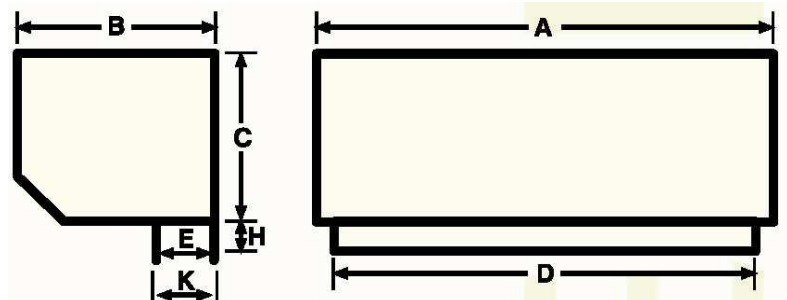

INDUSTRIAL TYPE - **SIMPLE** AIR CURTAINS

133 mm cross flow fan



OPERATIONAL CHOICES

A) Wired Remote Control Operation

Wall Mounted Wired Remote Control
(from 2.5m up to 6 m cable)
which additionally can be supplied
with an Infrared Remote Control as well.



B) Infrared Remote Control Operation

Unit is provided with a build in Panel
(electronic) and an Infrared Remote Control .



**Both above described options
can be either delivered :**

- 1). Two speed operation (HI - LOW)
- 2). NL operation :
 - 15 different speeds
 - 1 up to 240 units in parallel connection
 - Master - Slave Operation
 - OLEFINI BMS monitoring

