

INDUSTRIAL TYPE - **SIMPLE** AIR CURTAINS

133 mm cross flow fan




# K - 24



**For use in :**

- **Large Industrial Spaces**
- **Storage Plants**
- **Storage Areas**
- **Airports**
- **Cold Rooms**

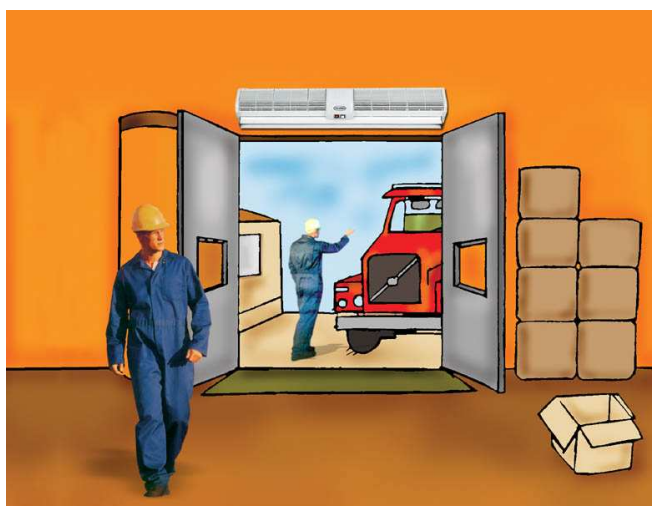

## INDUSTRIAL TYPE - **SIMPLE** AIR CURTAINS

133 mm cross flow fan




Air Curtain K – 24 is capable of covering openings of 1.20 m long

### Technical Details


Max Door Height (m)	6.00
Max Door Width (m)	1.20
Outlet Velocity (m/sec)	14/12
Air Volume (m <sup>3</sup> /h)	3000/2600
Motor Power (W)	660
Capacitor (μF)	12
Motor Speed (rpm)	1370/1100
Power Supply	230V, 1N, 50Hz
Noise level in 1 m (dB)	68 / 65

### AIR VELOCITY DISTRIBUTION CHART

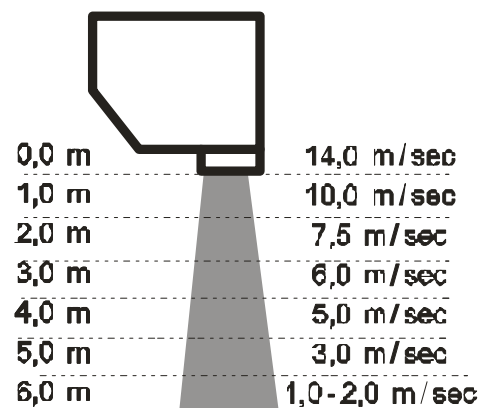

### Dimensions

A: Total Length	1255±2 (mm)
B: Total Width	231 (mm)
C: Height	227 (mm)
D: Outlet Length	1200 (mm)
E: Outlet Width (int.)	60 (mm)
K: Outlet width (ext.)	76 (mm)
H: Outlet Height	64 (mm)
Weight	31 (Kgr)

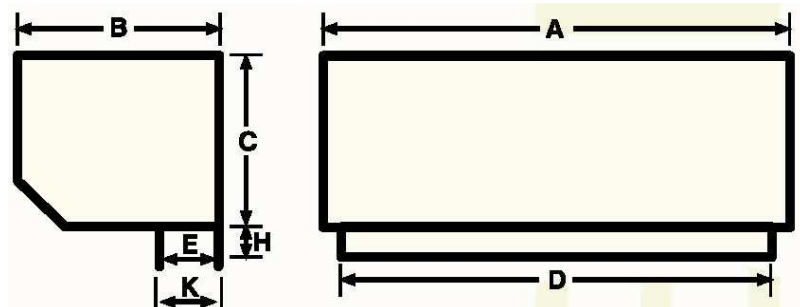

# INDUSTRIAL TYPE - **SIMPLE** AIR CURTAINS

---

## 133 mm cross flow fan



## OPERATIONAL CHOICES

### A) Wired Remote Control Operation

Wall Mounted Wired Remote Control  
( from 2.5m up to 6 m cable)  
which additionally can be supplied  
with an Infrared Remote Control as well



### B) Infrared Remote Control Operation

Unit is provided with a build in Panel  
( electronic ) and an Infrared Remote Control .



**Both above described options  
can be either delivered :**

- 1). Two speed operation ( HI - LOW )
- 2). NL operation :
  - 15 different speeds
  - 1 up to 240 units in parallel connection
  - Master - Slave Operation
  - OLEFINI BMS monitoring

